


Technical Profile

GT Range

Magnet drive end suction centrifugal pumps for general applications


For general transfer duties, the GT pump has been specifically designed as a compact, cost-effective and minimum maintenance pump. The GT is sized below ASME / ISO dimensions and has a number of features, which make it one of the most highly competitive pumps in its class. Thanks to its simplicity of maintenance, space-saving design and interchangeability, the GT pump proves a very popular choice.

GT pumps are of a close coupled construction and can be supplied free standing or baseplate mounted. Prime mover specifications of all denominations can be catered for with a range of Synchronous Magnet Drives rated to match.

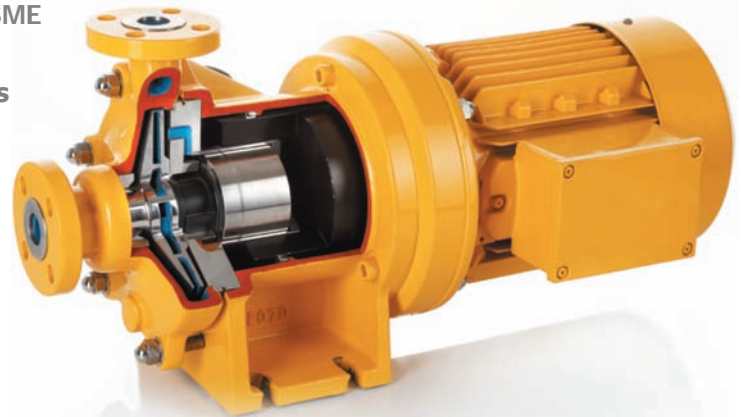

HMD Kontro

Performance of the GT range

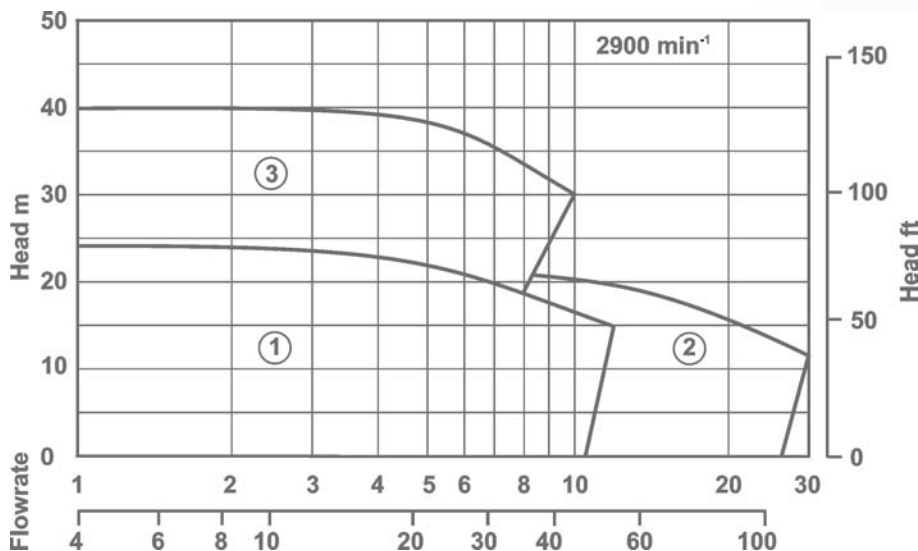

Pump model

	GTA	GTI
1	1 x 1 x 5	25-25-125
2	2 x 1.5 x 5	50-40-125
3	1 x 1 x 6	25-25-160

Design range limits

The GT pump is designed to operate from -40°F up to 500°F, -40°C up to 260°C without the need for any ancillary cooling medium. Design working pressure is 275 psi, 18.9 bar.

Solids handling capability

The unit is capable of handling solids up to 5% w/w less than 150 microns.

Options

Materials of construction

Wetted parts Alloy 20, Alloy C
Gasket PTFE

Other options

Casing drains flanged or screwed
Jacketed pump casing
Large range of pump protection


Key Design Features

- **No seals:** To minimise maintenance, all of the associated costs and eliminate potential leaks.
- **Sealless design:** For total containment, essential for hazardous, aggressive or valuable product.
- **Interchangeability of components:** For maximum convenience and reduced stock holding, operator training etc.
- **High efficiency wet end:** To benefit maximum flow / head coverage.
- **Wide choice of materials:** To allow a choice of various metals in the construction of your pump.
- **Casing gasket fully confined:** So eliminating risk of blowout.
- **Universal connection options:** So that suction and discharge flange connections can be configured to your exact requirements.
- **Modular rotating element cartridge:** Providing the most efficient way to perform replacements and manage your spare part inventory.

Benefits of GT pump range

- Sealless design for total product containment
- Low capital cost
- Compact modular design
- Low running costs
- Minimal downtime
- Supplied with ASME or ISO flanges

Construction of GT pumps

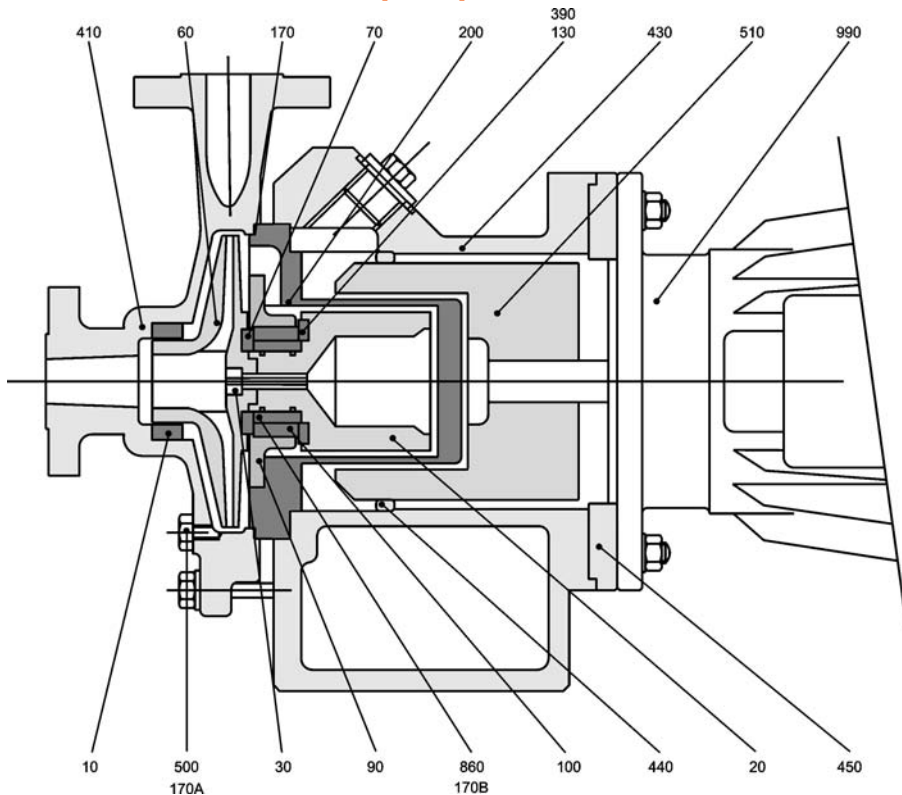

10	Neck Ring [Front]	316 Stainless Steel
20	Shaft / Inner Magnet Ring	316 Stainless Steel
30	Impeller Fixing	316 Stainless Steel
60	Impeller	316 Stainless Steel
70	Front Thrust Washer	Alpha SiC
90	Bush Holder	316 Stainless Steel
100	Bush	Alpha SiC
130	Thrust Pad	Alpha SiC
170	Casing Gasket	CSF
170A	Drain Gasket [Optional]	CSF
170B	'O' Ring	Viton A
200	Containment Shroud/Shell	316L Stainless Steel
390	Support Gasket	Exfol. Graphite
410	Casing	316 Stainless Steel
430	Coupling Housing	SG Iron
440	Coupling Hsg. Bump Ring	Phos. Bronze
450	Motor Adaptor	Carbon Steel
500	Pump Drain [Optional]	316 Stainless Steel
510	Outer Magnet Ring	Carbon Steel
860	Bearing Sleeve	Alpha SiC
990	Electric Motor	Proprietary
***	Fixings Kit	

Flanges and Connections

Casing

Suction and discharge flanges are designed in accordance with the following relevant standards:

**ANSI B16.5
Class 150 + 300**

Machined with 0.06" (1.5mm) high raised face having a continuous spiral groove.

**DIN 2543/2545
PN16 + PN40**

Machined with a 2mm high raised face with a continuous spiral groove. (Note: these flanges are identical to BS4504 PN40.)

Flange Loadings

Allowable flange loadings imposed by pipework are in accordance with Table 4 of API 685 2nd edition and exceed the values in ISO 5199 Annex C.

Drain Connections

The following drain options are available:

Standard: No drain, boss left undrilled.

Option 1: 1/8" BSP drain plug fitted with fully trapped gasket.

Option 2: 3/8" NPT plug.

Option 3: 1/2" flanged drain rated to the casing flanges.



Gauge Connections:

No provision for gauge connection bosses has been made on this range.

Dimensions of GT pumps

Dimensions are for guidance only

Position of Temperature Sensing Device [if fitted]

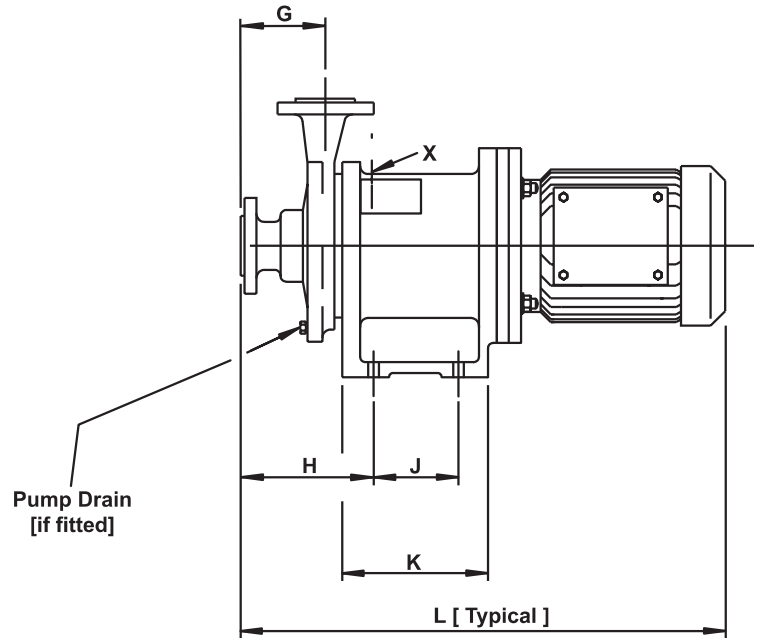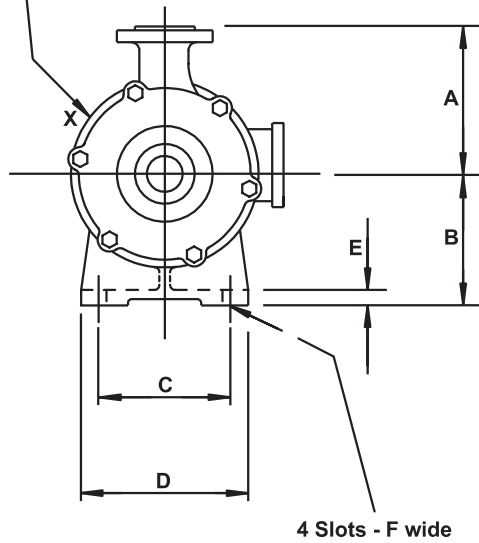

Pump size	A	B	C	D	E	F	G	H	J	K	Motor Frame	L
1x1x5	6.3"/160	5.9"/150	5.9"/150	7.7"/195	0.6"/15	0.55"/14	3.35"/85	5.7"/144	3.15"/80	5.8"/147	80	21.25"/540
1x1x6	6.3"/160	5.9"/150	5.9"/150	7.7"/195	0.6"/15	0.55"/14	4.13"/105	6.5"/164	3.15"/80	5.8"/147	90S	22"/560
2x1.5x5	6.3"/160	5.9"/150	5.9"/150	7.7"/195	0.6"/15	0.55"/14	4.33"/110	6.7"/171	3.15"/80	5.8"/147	90L	23"/584
											100L	25.6"/650
25-25-125	6.3"/160	5.9"/150	5.9"/150	7.7"/195	0.6"/15	0.55"/14	3.35"/85	5.7"/144	3.15"/80	5.8"/147	112M	25.6"/650
25-25-160	6.3"/160	5.9"/150	5.9"/150	7.7"/195	0.6"/15	0.55"/14	4.13"/105	6.5"/164	3.15"/80	5.8"/147	132S	27.5"/700
50-40-125	6.3"/160	5.9"/150	5.9"/150	7.7"/195	0.6"/15	0.55"/14	4.33"/110	6.7"/171	3.15"/80	5.8"/147	143	22.5"/570
											145	22.5"/570
											182	24.5"/625
											184	26.4"/670
											213	27.5"/700
											215	29.3"/745

Dimensions shown are imperial (inches) / metric (mm).

Range capabilities

Model	Head	Flow	Design Temperature	Design Pressure	Viscosity cSt	Mounting
1x5x5	78 ft 24 m	48 USgpm 11 m ³ /h	-40 to 500°F -40 to 260°C	275 psi 18.9 bar	200	Close coupled (CC)
1x1x6	131 ft 40 m	44 USgpm 10 m ³ /h	-40 to 500°F -40 to 260°C	275 psi 18.9 bar	200	Close coupled (CC)
2x1.5x5	72 ft 22 m	132 USgpm 30 m ³ /h	-40 to 500°F -40 to 260°C	275 psi 18.9 bar	200	Close coupled (CC)
25-25-125	78 ft 24 m	48 USgpm 11 m ³ /h	-40 to 500°F -40 to 260°C	232 psi 16 bar	200	Close coupled (CC)
25-25-160	131 ft 40 m	44 USgpm 10 m ³ /h	-40 to 500°F -40 to 260°C	232 psi 16 bar	200	Close coupled (CC)
50-40-125	72 ft 22 m	132 USgpm 30 m ³ /h	-40 to 500°F -40 to 260°C	232 psi 16 bar	200	Close coupled (CC)

Pressure Limits

All parts are to be rated to the pressures shown below at 100°F / 38°C

Flange standard	Design pressure		
	316 St St	Alloy 20	Alloy C
ANSI B16.5 Class 150 + 300	1.89 MPa 275 psi	1.59 MPa 230 psi	2.0 MPa 290 psi
BS 4504 PN16 + PN40	1.6 MPa 232 psi	1.52 MPa 220 psi	1.6 MPa 232 psi
DIN 2543/2545 PN16 + PN40	1.6 MPa 232 psi	1.52 MPa 220 psi	1.6 MPa 232 psi

Component	Hydrostatic test values		
	316 St St	Alloy 20	Alloy C
Casing (ANSI 150 + 300lb)	2.93 MPa 425 psi	2.41 MPa 350 psi	3.1 MPa 450 psi
Casing (PN16 + PN40)	2.4 MPa 348 psi	2.3 MPa 330 psi	2.4 MPa 348 psi
Containment Shroud/Shell	2.93 MPa 425 psi	2.41 MPa 350 psi	3.1 MPa 450 psi

Temperature limits

Standard Range	-40°F to 300°F / -40°C to 150°C
Option	-40°C to 500°F / -40°C to 260°C

For sub zero temperatures a suitable sealing compound (Loctite Multi Gasket or similar) is used to prevent the ingress of moisture into the coupling housing between the containment shroud/shell and motor adaptor assembly interface.

Sundyne Headquarters:
Sundyne, LLC
 14845 West 64th Avenue
 Arvada, Colorado 80007
 USA
 1-866-Sundyne
 Phone: 1 303 425 0800
 Fax: 1 303 940 2911
 www.sundyne.com

Sundyne United Kingdom:
Sundyne HMD Kontro Sealless Pumps
 Marshall Road
 Hampden Park Industrial Estate
 Eastbourne East Sussex, BN22 9AN
 United Kingdom
 Phone: +44 (0)1323 452000
 Fax: +44 (0)1323 503369

Sundyne China:
Sundyne Industrial Equipment (Tianjin) Company Limited
 Building 1, No. 879 Shen Fu Road
 XinZhuang Industrial Zone
 Min Hang District
 Shanghai, China 201108
 Phone: +86 21 5055 5005
 Fax: +86 21 5442 5265

Sundyne France:
Sundyne International S.A.
 13-15, Bld. Eiffel - B.P. 30
 21604 Longvic Cedex
 France
 Phone: +33 (0)3 80 38 33 00
 Fax: +33 (0)3 80 38 33 66

Sundyne Spain:
Sundyne Marelli Bombas, S.R.L.
 Ctra. Madrid-Toledo, Km.30.8
 45200 Illescas
 Toledo, Spain
 Phone: +34 925 53 45 00
 Fax: +34 925 51 16 00

Worldwide Sales Headquarters
 Unit 2 Harvington Business Park
 Brampton Road
 Hampden Park Industrial Estate
 Eastbourne East Sussex, BN22 9BN
 United Kingdom
 Phone: +44 (0)1323 452125

All information provided is subject to change without notice.

© 2014 Sundyne, LLC
 All Rights Reserved. Other logos and trade names are property of their respective owners.

Sundyne HMD Kontro
 GT 2.0 9/14 Letter